


Facing attachment KS series

This attachment is in addition of our portable boring machine range. It is dedicated to face thrust faces. The attachment is directly mounted onto our standard boring bar without any modification.



- Facing attachment
- Boring bar

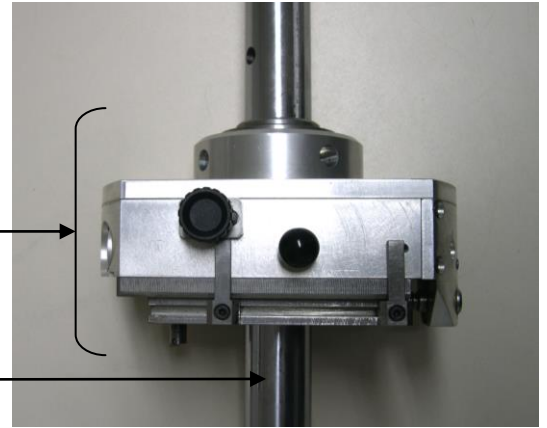

Technical Datas :

	KS40	KS60	KS80
Radial stroke	50	103	103
Machining range	From Ø45 to 320 mm	From Ø 65 to 610 mm	From Ø 85 to 610 mm
Overall Ø	215 mm	420 mm	420 mm
Weight	6 kg	16 kg	16 kg

Feed motion : Mechanical in accordance with rotation.
Adjustable speed ; 2 ways travel.
2 adjustable thrusts , with automatic release
Tool bit type : with carbide insert

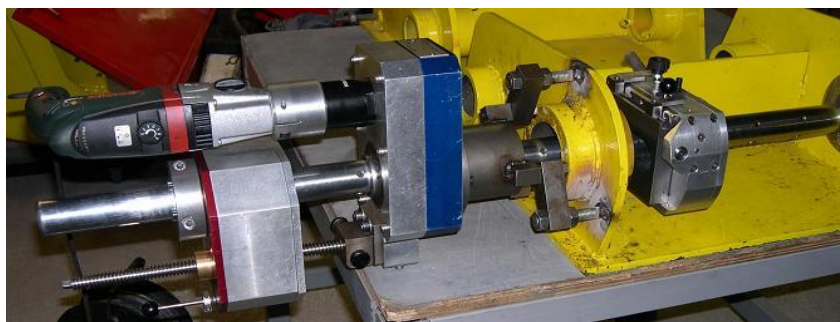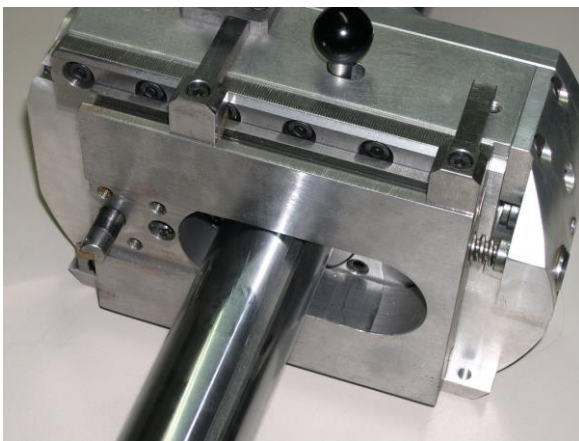

This attachment needs no other motor than the one of the portable boring bar.

It is available for all model of Boring Bar.

This attachment is proposed in addition of the boring machine.
It is delivered ready to use with screws, tool bit, carbide inserts...